
XR650 Control Panel

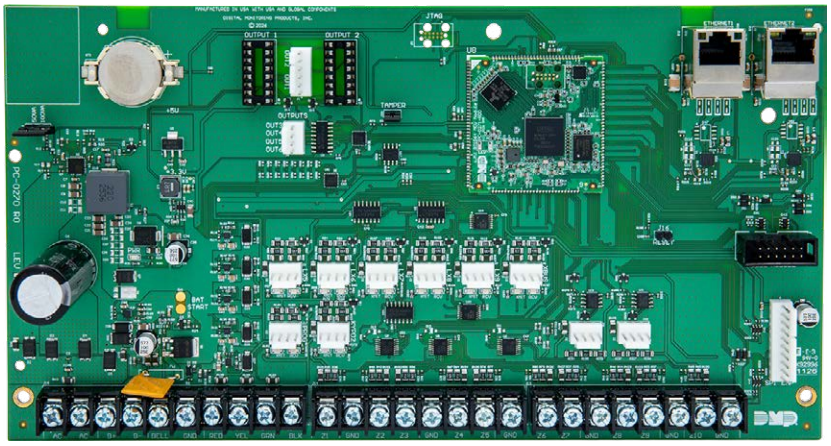

Benefits

- Dual NIC plus Adaptive Technology™ for always-supervised communications with minimal cellular cost
- Bank-grade cybersecurity with TLS 1.3, AES, PKI and automated certificate provisioning
- Supports enterprise banking needs with up to 300,000 users, 99 areas, 96 doors of access and 574 zones

Features

- UL Burg, Access, Bank, Safe and Vault listed
- Built-in Power Supply: regulated 12 VDC, 5A max auxiliary output
- Dual NIC onboard 10/100 network communication
- Dual keypad bus support
- 10 onboard zones with autosensing
- X-Bus, AX-Bus and five LX-Bus expansion support
- Fully supervised cellular communication
- Supports DMP Two-Way Wireless™
- AlarmVision® and Entré™ support*
- 802.1X network authentication with automated certificate enrollment via SCEP
- 574 zones
- 300,000 user codes with 1,000 groups
- 99 areas
- Up to 96 supervised door access points
- Up to 16 supervised keypads
- 32-character names available for user, zone, area and group names
- Fully supervised network
- Communications Diagnostics check network and cellular communication status from the keypad
- Eight communication paths between the panel and monitoring center
- Lockdown operation from keypad or mobile app
- 100,000 event buffer
- French, Spanish and English menus available
- Custom Actions

**available with licenses*

XR650 Control Panel

ENCRYPTION FEATURES

- FIPS 140-3*†
- TLS 1.3
- AES encryption
- PKI support with dual certificate trust domains
- Automated certificate provisioning via SCEP
- IPV4 and IPV6 support

BANK FEATURES

- UL Bank, Safe and Vault
- Card Plus Pin
- User Inactivity Audit
- Dual Authority
- Panic Button Test
- Early Morning Ambush

BANK / ENTERPRISE CYBER FEATURES

- Dual NIC for secure public network communication while maintaining a physically isolated network for video and access control devices
- Adaptive Technology™ — cost-effective supervised cellular backup
- PKI with dual certificate trust domains
- Multiple certificates supported: Certificate servers, one factory-loaded*
- 802.1x network authentication for bank IT-compliant LAN access*

*available with licenses
† available soon

SYSTEM SPECIFICATIONS

Primary Power (Included):

16.5 VAC at 50 VA
16.5 VAC at 100 VA

Secondary Power:

12 VDC Battery
Models: 364, 365, 366, 368, 369

Outputs Ratings:

Default 2.5 Amps at 12 VDC
2 Options:
50VA - 2.5A at 12 VDC
100 VA - 5A at 12VDC

Current Draw:

133 mA

Enclosures:

Model 350 (Gray)
Model 350A (Gray)
Model 352X (Gray)
Model 341 (Gray)

CERTIFICATIONS

FCC Part 68
FCC Part 15
Underwriters Laboratories (UL) Listed
- UL Bank, Safe, and Vault
- UL Encrypted Line Security

DMP.com | 800-641-4282
2500 N. Partnership Blvd
Springfield, MO 65803

DMP terms and conditions are located at DMP.com/Terms
© 2026 Digital Monitoring Products, Inc.
LT-3139 | 11/19/2026