

SCS-1062 Time Chip

Important Information



CAUTION: PRESS AND HOLD THE PROCESSOR RESTART BUTTON LOCATED ON THE SCS-120 MULTIBUS POWER SUPPLY CARD WHILE APPLYING POWER TO OR REMOVING POWER FROM THE RECEIVER.

CAUTION: LOCATE THE RECEIVER KEY BEFORE INSTALLING THE TIME CHIP.

CAUTION: THE RECEIVER PROGRAMMING REVERTS TO FACTORY DEFAULTS AS SOON AS THE TIME CHIP IS INSTALLED.

Locating the Processor Restart Button

The Processor Restart Button is located on the left side of the SCS-120 Multibus Power Supply Card. See Figure 1.

Locating the Receiver Key

Note: WITHOUT THE CORRECT RECEIVER KEY, REMOTE DOWNLOAD/UPLOAD ACCESS TO PANELS IS LOST.

You must re-enter the Receiver Key to be able to upload/download data to the panels after installing the SCS-1062 Time Chip. The receiver key may be recorded in the Important Information section located in Appendix C of the SCS-1R Guide (LT-0717).

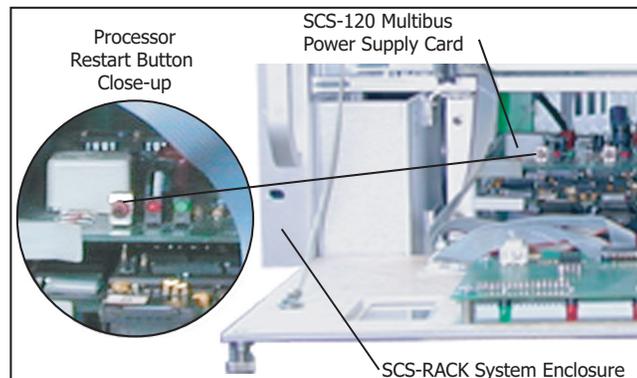


Figure 1: Processor Restart Button Location

Identifying Receiver Programming

Note: WHEN THE SCS-1062 TIME CHIP IS INSTALLED ALL PREVIOUS PROGRAMMING IS LOST.

Double check the SCS-1R programming information and make a note of all receiver programming before installing the SCS-1062 Time Chip.

Installing the SCS-1062 Time Chip

Note: Make sure AC power to the receiver is removed. PRESS AND HOLD THE PROCESSOR RESTART BUTTON WHILE REMOVING POWER FROM THE RECEIVER.

Remove the SCS-1062 Processor Card out of the SCS-RACK Multibus Rack lower position. The SCS-1062 Time Chip installs in ROM 0 position on the SCS-1062 Processor Card.

Remove the EEPROM chip from ROM 0. The SCS-1062 Time chip has one pin bent to connect to a resistor at one end. Leave this pin as is. Check the SCS-1062 Time Chip and straighten any other bent pins before installation. See Figure 2 and refer to PROM Installation (LT-0240).

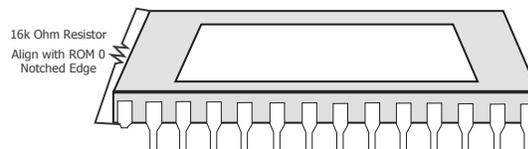


Figure 2: SCS-1062 Time Chip

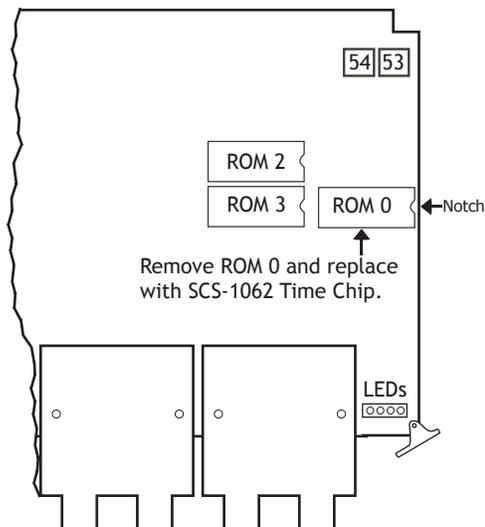


Figure 3: ROM 0 Position Location

Align the SCS-1062 Time Chip resistor edge with the notch in ROM 0 and the pins with ROM 0 pinout. Firmly press the SCS-1062 Time Chip into place. See Figure 3.

After installing the Time Chip, slide the SCS-1062 Processor Card back into the SCS-RACK Multibus Rack lower position and snap it into place.

Note: PRESS AND HOLD THE PROCESSOR RESTART BUTTON WHEN APPLYING POWER TO THE RECEIVER.